


PVE 4 NL HAMMER

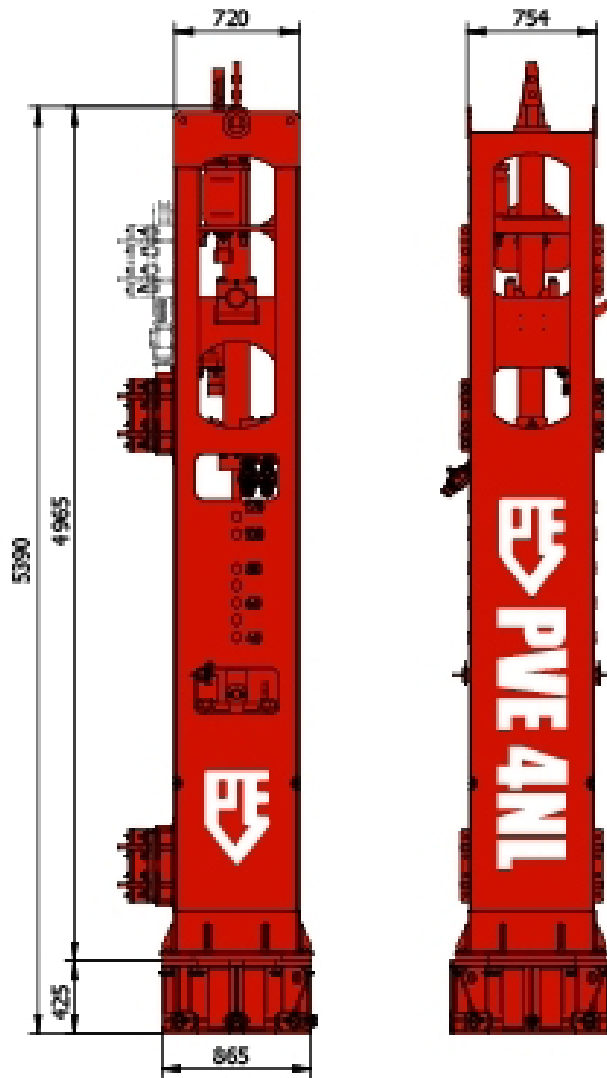

all dimensions are in millimeters

- Cylinder assembly in a way that minimizes wear and tear on bearings
- High quality and easy to exchange drive cap assembly
- Shock-resistant electronic connectors & high quality electronic cable
- Accelerated mode to optimize efficiency
- Modular design which makes parts interchangeable
- Solid construction of leader guidance assembly
- High consistent blow rate at max. stroke

Technical specifications

Max. rated energy:	57 kJ
Blow rate:	40 bl/min
Hammer weight:	7,2 ton
Maximum net. energy:	57 kJ
Maximum stroke:	1200 mm
Minimum stroke:	100 mm
Ram weight:	4 ton
Maximum pressure:	155 bar
Required oilflow:	390 l/min
Length indication:	5390 mm
Width indication:	940 mm
Height indication:	940 mm

Sun Piledriving Equipment, LLC
35322 Bayard Road
Frankford, DE 19945

Tel. 302.539.7187
info@spe-usa.net
www.spe-usa.net

